

LaViuda

FIJALUX

CELOSÍA FIJA

FIXED LOUVER PANEL



#17



La Viuda nace en Sax, pequeña localidad de la provincia de Alicante. En la actualidad nuestros productos están presentes en cuatro continentes.

Somos fabricantes y contamos con una amplia gama de artículos que se caracteriza por el sello distintivo de calidad y durabilidad de los productos de LaViuda.

Las celosías FIJALUX, fabricadas en PVC de alta calidad y doble pared o en aluminio extrusionado monopared, son de muy fácil y rápida instalación, y sus dos medidas de separación de lama fija permiten regular y disminuir la entrada de luz solar, la lluvia y la circulación del aire, o simplemente restar visibilidad desde el exterior, tanto en residencias particulares en las que se requiere una mayor intimidad (terrazas, galerías, etc.), como en zonas comunitarias (jardines, piscinas, aparcamientos, etc.) en las que se precisa más privacidad.

LaViuda is based in Sax, a small town in the province of Alicante (Spain). Currently, our products are present in four different continents.

We are manufacturers and have a wide range of articles characterized by the distinctive seal of quality and durability of LaViuda products.

The FIJALUX fixed louver panel system, manufactured in high quality and double-walled PVC or single-wall extruded aluminium, is very easy and quick to install. Their two fixed slat separation measurements allow to regulate the system and reduce the sunlight entry, the rain and the air circulation. It also reduces visibility from the outside, both in private residences in which greater privacy is required (such as terraces, galleries, etc.), as well as in communal areas (such as gardens, swimming pools, car parks, etc.).




ÍNDICE / INDEX

CELOSÍA FIJA DE PVC / 04 - 05 /
PVC fixed louver


CELOSÍA FIJA DE ALUMINIO / 06 - 07 /
Aluminum fixed louver

PVC DOBLE PARED / PVC DOUBLE-WALL

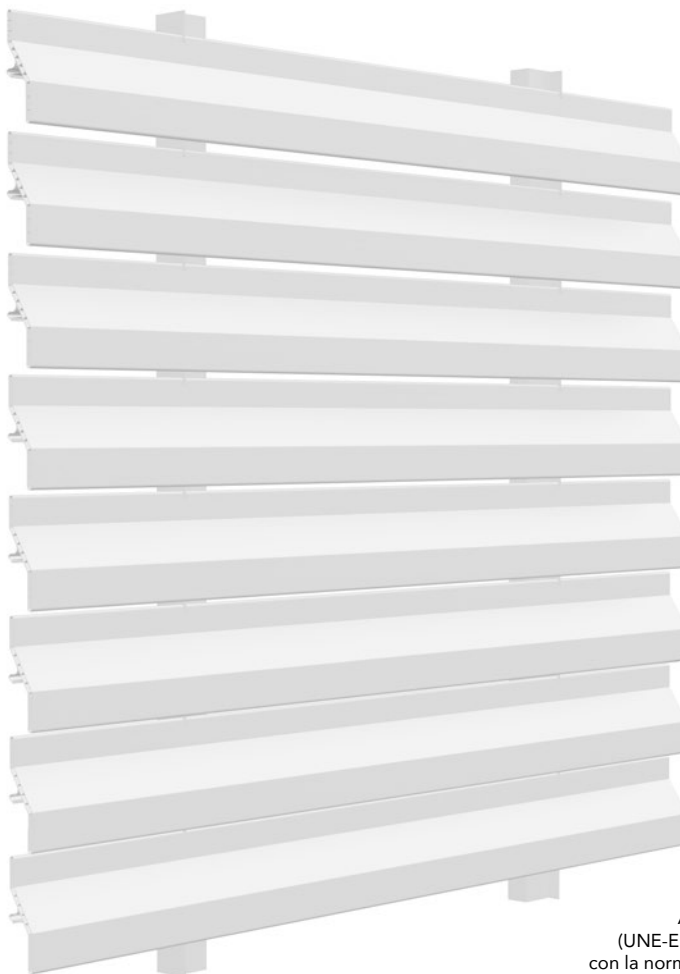

RESISTENCIA
A LA CARGA DE VIENTO
(UNE-EN 1932: 2001 de acuerdo
con la norma UNE-EN 13659: 2004):
CLASE 3 (separación máxima entre soportes: 0,90 m)

WIND LOAD RESISTANCE
(UNE-EN 1932: 2001 according to UNE-EN 13659: 2004):
CLASS 3 (separation between supports: 0,90 m)

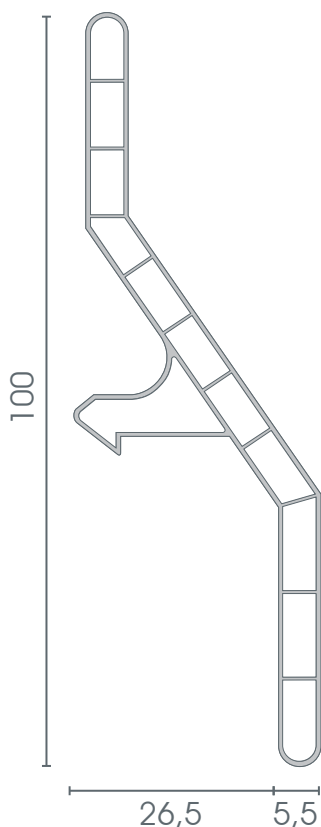
























DATOS TÉCNICOS TECHNICAL DATA

• Material	PVC
• Peso <i>Weight</i>	355 gr/m
• Paso de lama (mm) <i>Slat width</i>	100 mm
• Espesor de perfil (mm) <i>Profile thickness</i>	5,5 mm
• Lamas por metro de altura <i>Number of slats per 1 m of curtain height</i>	10 (paso 100) <i>Slat width 100</i>
• Ancho máximo aconsejado <i>Maximum width recommended</i>	1.000 mm




GAMA DE COLORES RANGE OF COLOURS

		LACADOS LAQUERED										
BRUT	BLANCO		MARFIL	NEGRO MATE (9111)	1011	1013	1015	3005	6005	6009	7012	7016
												
GRIS	MARFIL		7022	7035	8003	8007	8014	8017	8019 (TESTA DI MORO)	9006	9007	


ALUMINIO MONOPARED

/ ALUMINIUM SINGLE-WALL

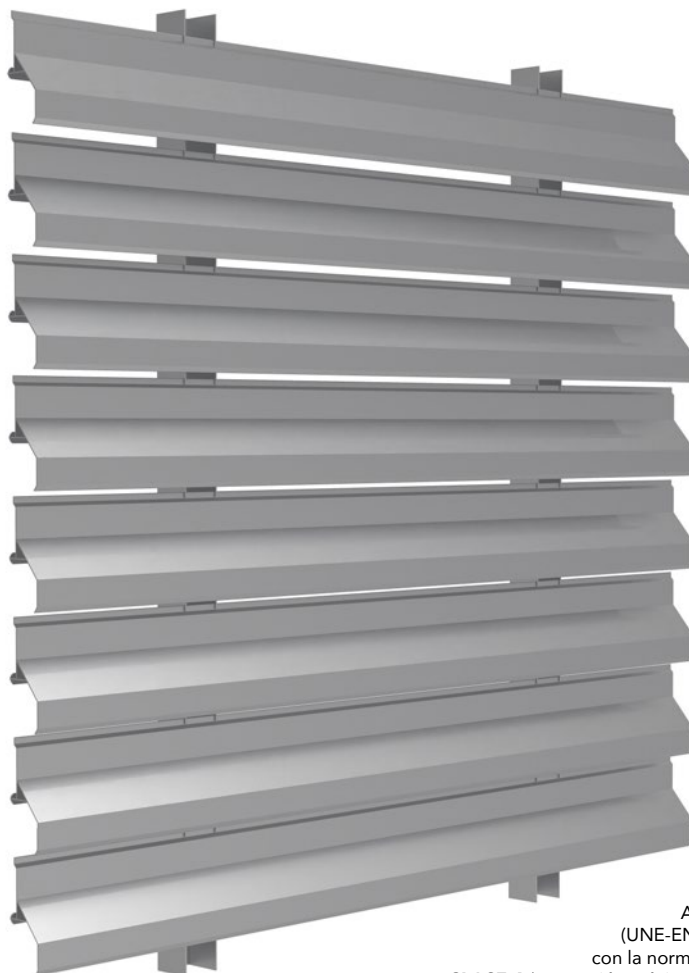

RESISTENCIA
A LA CARGA DE VIENTO
(UNE-EN 1932: 2001 de acuerdo
con la norma UNE-EN 13659: 2004):
CLASE 6 (separación máxima entre soportes: 1,50 m)

WIND LOAD RESISTANCE
(UNE-EN 1932: 2001 according to UNE-EN 13659: 2004):
CLASS 6 (separation between supports: 1,50 m)

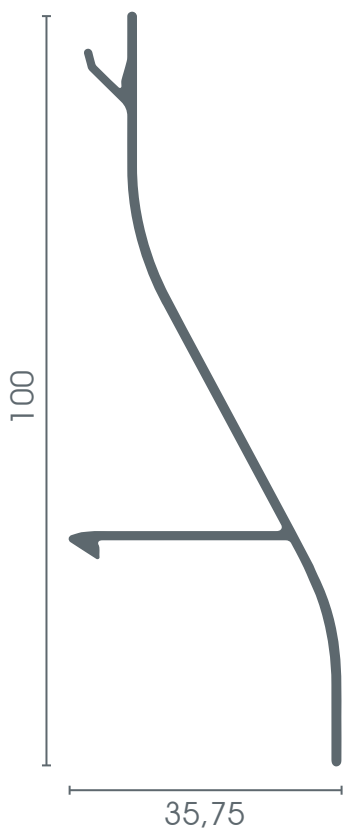
























DATOS TÉCNICOS TECHNICAL DATA

• Material	Aluminio <i>Aluminium</i> 6063 T5
• Peso <i>Weight</i>	554 gr/m
• Paso de lama (mm) <i>Slat width</i>	100 mm
• Espesor de perfil (mm) <i>Profile thickness</i>	1,4 mm
• Lamas por metro de altura <i>Number of slats per 1 m of curtain height</i>	10 (paso 100) <i>Slat width 100</i>
• Ancho máximo aconsejado <i>Maximum width recommended</i>	1.500 mm



GAMA DE COLORES RANGE OF COLOURS

		LACADOS LAQUERED										
BRUT	BLANCO		MARFIL	NEGRO MATE (9111)	1011	1013	1015	3005	6005	6009	7012	7016
												
GRIS	MARFIL		7022	7035	8003	8007	8014	8017	8019 (TESTA DI MORO)	9006	9007	

GAMA DE COLORES RANGE OF COLOURS



BRUT



GRIS

LACADOS LAQUERED



MARFIL



1011



1015



6005



7012



7022



8003



8014



8019 (TESTA DI MORO)



9007



BLANCO



MARFIL



NEGRO MATE (9111)



1013



3005



6009



7016



7035



8007




8017




9006

CELOSÍAS DE PVC Y ALUMINIO PVC AND ALUMINIUM LOUVERS

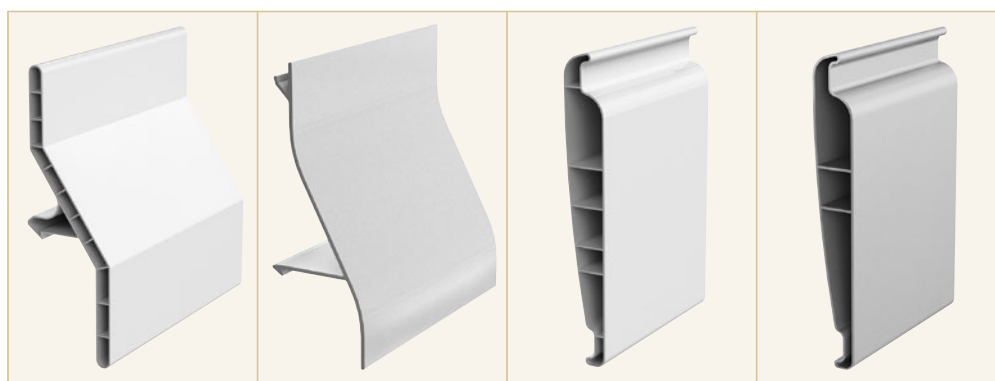

FIJALUX 100

PLEGALUX 145



	PVC	Aluminio <i>Aluminium</i>	PVC	Aluminio <i>Aluminium</i>
Material	PVC	Aluminio <i>Aluminium</i>	PVC	Aluminio <i>Aluminium</i>
Paso de lama <i>Slat width</i>	100 mm	100 mm	130 mm	130 mm
Espesor de perfil <i>Profile thickness</i>	5,5 mm	1,4 mm	20,5 mm	20,5 mm
Lamas por metro de altura <i>Slats per 1 m of curtain height</i>	10 (paso 100) <i>(slat width 100)</i>	10 (paso 100) <i>(slat width 100)</i>	8	8
Ancho máximo aconsejado <i>Maximum width recommended</i>	1.000 mm	1.500 mm	pivote <i>pivot</i> 1.500 mm reja <i>grille</i> 2.000 mm	pivote <i>pivot</i> 2.000 mm reja <i>grille</i> 2.500 mm
Peso (gr/m) <i>Weight (gr/m)</i>	355	554	490	1.123
Resistencia al viento <i>Wind load resistance</i>	Clase 3 <i>Class 3</i>	Clase 6 <i>Class 6</i>	Clase 5 <i>Class 5</i>	Clase 6 <i>Class 6</i>

Nuestra cartera de productos es fruto de un trabajo constante de nuestro equipo profesional en la investigación, desarrollo y diseño y de una ardua investigación que durante años ha permitido posicionarnos entre los mejores fabricantes de cerramientos y sistemas de protección solar de PVC y aluminio.

Nuestra filosofía combina la elaboración de soluciones con prestaciones técnicas de alta calidad junto a la intensa dedicación en la satisfacción de clientes exigentes que buscan soluciones de confort para proteger su vivienda.

Somos fabricantes y cuidamos hasta el mínimo detalle para asegurar el más alto nivel de calidad en todos los productos que ofrecemos. Buscamos aquellos valores que nos definen como marca y sobre los que radica nuestra diferenciación: la **calidad**, el **diseño**, la **capacidad de respuesta** y el **servicio** forman el ADN de LaViuda.

Our product portfolio is the result of our professional team's constant work in research, development and design as well as of an arduous investigation that for years has allowed us to position ourselves among the best manufacturers of PVC and aluminium enclosures and solar protection solutions.

Our philosophy combines the development of solutions that have a high-quality technical performance together with an intense dedication to the satisfaction of demanding customers who seek comfort solutions to protect their home.

We are manufacturers and take care of even the smallest detail to ensure the highest level of quality in all the products we offer. We seek those values that define us as a brand and on which our differentiation lies: **quality**, **design**, **responsiveness** and **customer service** form LaViuda's DNA.

